

Product Datasheet model uvex i-3 Tactical Set 9190 027

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- adjustable, multi-feature premium quality safety spectacle
- the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure
- side arms with multi-incline points allow for a high level of individualization to ensure a good fit for all facial shapes and head widths
- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- high-performance polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free
- tested in accordance with STANAG 2920/4296
- set includes:
 - spectacle with clear UV filter
 - replacement lens sunglare protection filter grey 14 %
 - replacement lens sunglare protection filter orange 70 %
 - uvex eyewear cord 9958 017
 - uvex microfibre cloth 9972 130
 - uvex eyewear case 9954 512

2. Technical Details Body

Frame

Material	TPU / TPE
Version	side arms with multi-incline points
Colour	black, anthracite

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.2 mm at PD
Coating	uvex supravision excellence
Colour	clear / grey 14 % / orange 70 %
UV protection	UV400

Marking clear lens

Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

Marking grey 14% lens	
Filter	5-3.1 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	
Marking orange 70% lens	
Filter	5-1.4 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Accessories

uvex eyewear cord



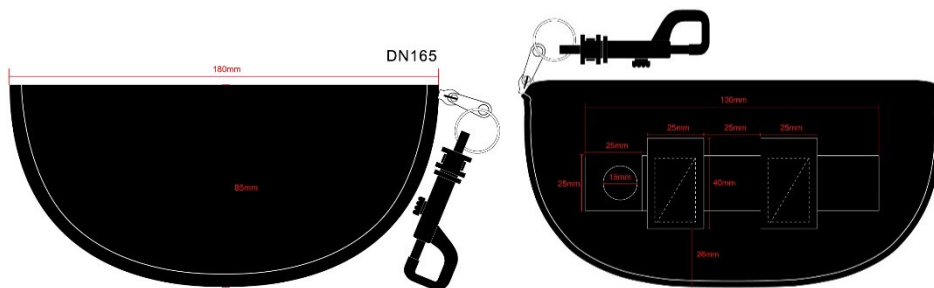
Material	cord: polyester adjustment toggle: plastic
Colour	black, with white uvex logo
Features	individual length adjustment
Dimensions (L x W)	65 x 1 cm

uvex microfibre cloth



Material	microfibre
Colour	black
Dimensions (L x W)	15 x 15 cm

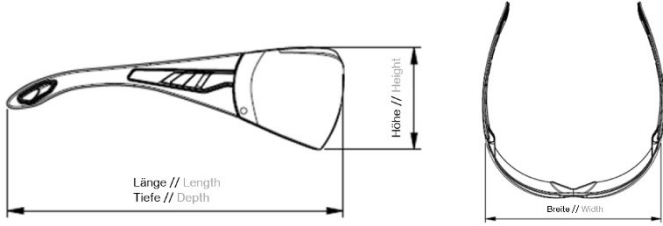
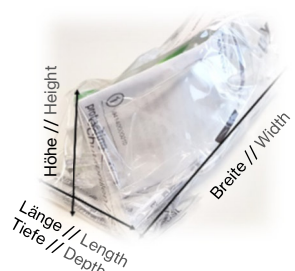
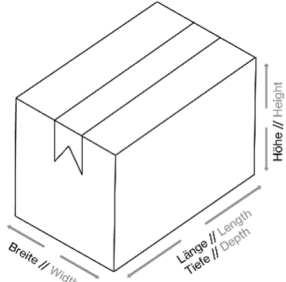
uvex eyewear case



Material	Outside: 100% 420 dinier nylon Inside: 100% banlon
Features	Molle system
Colour	black
Dimensions	8.5 x 18 x 10 (L x W x H)

5. Logistical Information

Spectacle

Weight	30g	
Dimensions (L x W x B) in approx. mm	 picture only for reference	
	156 x 151 x 48	
	Packing unit 1	Packing unit 2
EAN Code	4031101989839	4031101989846
Quantity in pcs.	1	10
Dimensions (L x W x H) in approx. mm	 picture only for reference	
	85 x 180 x 100	320 x 230 x 200
Net weight in approx. g	104	1.040
Gross weight in approx. g	126	1.400
Country of Origin	Germany	

5. Miscellaneous

Standards	EN 166 + EN 170 + EN 172 + STANAG 2920/4296
PPE Category	Category II